





MULTI-MONTI®

THE INNOVATIVE SCREW ANCHOR
FOR CONCRETE AND MASONRY

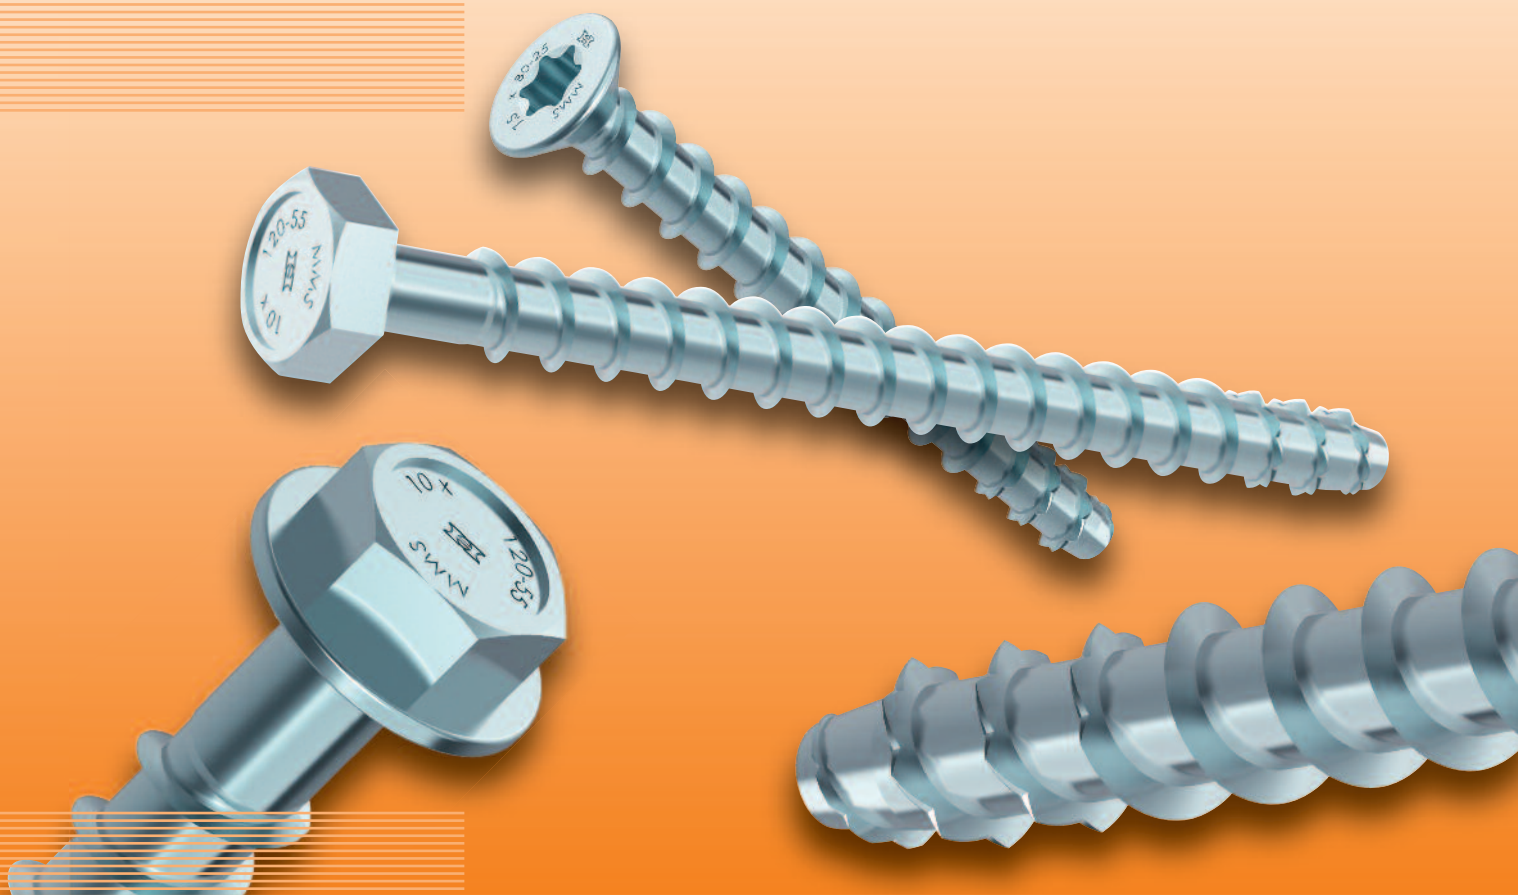

ADVANTAGES

- Fast and easy mounting
- High security level
- No time wasting, the anchor will bear loads immediately
- Can be completely removable
- No torque control required
- Easy power-tool handling possible
- Approved and monitored product

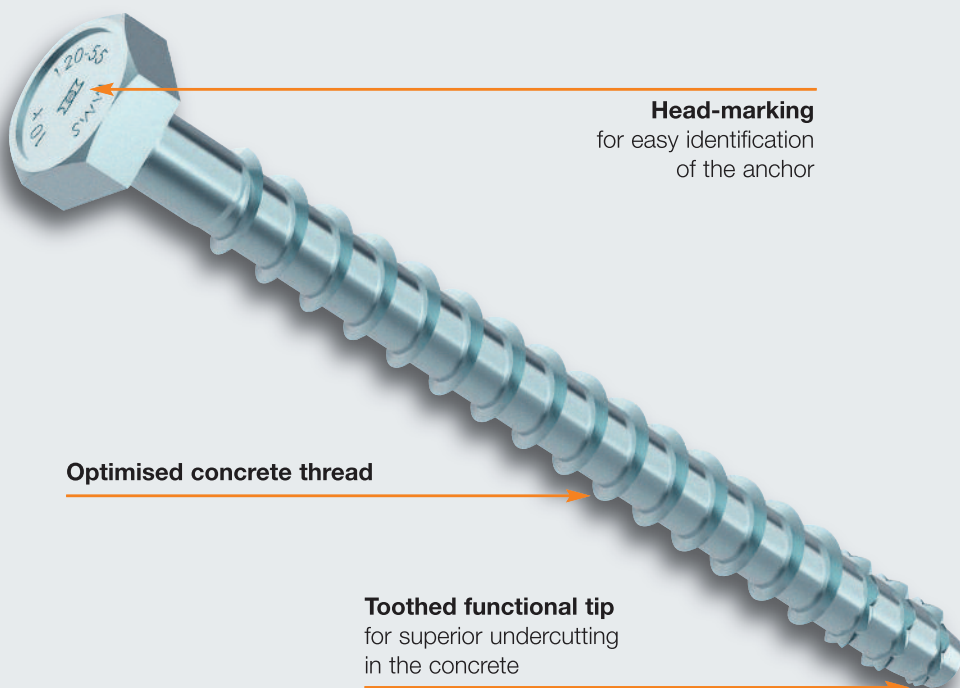































Head-marking
for easy identification
of the anchor

Optimised concrete thread

Toothed functional tip
for superior undercutting
in the concrete



Product range

	MMS-S Hexagon head bright zinc plated Lengths (mm): 40 to 160 Diameters (mm): 6,0 / 7,5 / 10,0 / 12,0 / 14,0 / 16,0 / 20,0	
	MMS-S Hexagon head with washer DIN 440 bright zinc plated Lengths (mm): 180 to 320 Diameter (mm): 12,0	
	MMS-SS Hexagon head with combined washer bright zinc plated Lengths (mm): 50 to 100 Diameters (mm): 6,0 / 7,5 / 10,0 / 12,0	
	MMS-I Screw-in-anchors with internal metric thread bright zinc plated Lengths (mm): 60 to 85 Diameters (mm): 7,5 / 10,0	
	MMS-ST with metric stud bright zinc plated Lengths (mm): 60 to 160 Diameters (mm): 6,0 / 7,5 / 10,0	
	MMS-MS Flange head bright zinc plated Lengths (mm): 45 to 60 Diameter (mm): 7,5	
	MMS-P Pan head bright zinc plated Lengths (mm): 30 to 80 Diameters (mm): 5,0 / 6,0 / 7,5 / 10,0	
	MMS-F Countersunk head bright zinc plated Lengths (mm): 30 to 160 Diameters (mm): 5,0 / 6,0 / 7,5 / 10,0	
	MMS-KS Reduced countersunk head bright zinc plated Length (mm): 40 Diameter (mm): 5,0	
	MMS-R Eye-bolt-anchor bright zinc plated Length (mm): 40 Diameter (mm): 6,0	
	MMS-S Hexagon head, phosphated tip stainless steel A4 1.4401 self-colour Lengths (mm): 65 to 120 Diameters (mm): 7,5 / 10,0 / 12,0	
	MMS-P Pan head, phosphated tip stainless steel A5 1.4571 self-colour Lengths (mm): 75 to 115 Diameter (mm): 7,5	
	MMS-F Countersunk head, phosphated tip stainless steel A5 1.4571 self-colour Lengths (mm): 75 to 115 Diameter (mm): 7,5	
	MMS-S Hexagon head DP-coated Lengths (mm): 50 to 120 Diameters (mm): 7,5 / 10,0 / 12,0	
	MMS-TC - TimberConnect bright zinc plated Lengths (mm): 100 to 160 Diameters (mm): 7,5 / 10,0 / 12,0	

For further information feel free to contact us

Application examples



Fixing of railing




Pipe mounting



Fixing of cable clamp



Screw-in-anchor



MULTI-MONT®-TimberConnect



HECO-Schrauben GmbH & Co. KG
Dr.-Kurt-Steim-Straße 28
D-78713 Schramberg
Telefon: +49 (0)74 22 / 9 89-0
Telefax: +49 (0)74 22 / 9 89-200
E-Mail: info@heco-schrauben.de
Internet: www.heco-schrauben.com



Your specialist dealer: